



# Metropolitan Parkway Streetscape Improvement Project - Phase II

City of Atlanta  
Department of Public Works

David E. Scott, P.E.  
Commissioner



*Existing Conditions*

October 18, 2006

**Description:** Streetscape improvements will be constructed on Metropolitan Parkway from the intersection of University Avenue to Deckner Avenue and from Casplan Street to Fair Street. Total project length is 4700 linear feet

**Funding:** Federal Funds (CMAQ Transportation Enhancement)  
Local Funds (Quality of Life)

**Status:** GDOT has approved this project to go out to bid for construction. We will be meeting with procurement this month to advertise this project for construction bids. *See schedule below for approximate dates of the remaining items.*


## Sidewalk Improvements

This project will replace the existing sidewalks on the east and west sides of Metropolitan Parkway from University Avenue to Deckner Avenue and along the east side of Metropolitan Parkway from Casplan Street to Fair Street. The sidewalks will be constructed with concrete paving, concrete pavers, and concrete curb and gutter. The concrete sidewalk will be a minimum of 6' in width with a 2' wide concrete paved utility strip located between the concrete curb and the sidewalk.

## Additional Improvements

- Residential and commercial curb cuts or drive aprons will be replaced and reduced where appropriate.
- ADA ramps and painted crosswalks will be located at all intersections and street crossings.
- Curb radii for cross streets will be enlarged to GDOT specified minimum of 25'
- University Avenue Intersection will incorporate ADA accessible ramps and painted crosswalks, brick pavers and granite seat walls at each corner.

## Project Schedule

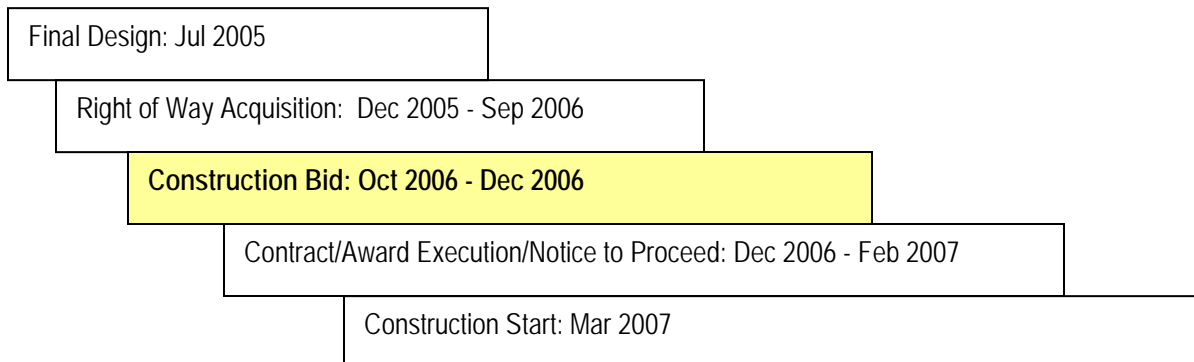

*For additional information, please contact the Department of Public Works, Office of Transportation  
(404) 330-6739*