

Trunk caliper shall meet COA standards. 2 1/2" min for recompense credit.


Correct rootball deficiencies before planting; remove straps, pins, nails, etc. from burlap and remove burlap to expose top 1/3 of rootball.

Round-topped soil berm 4" high x 8" wide above root ball surface shall be constructed just outside root ball.

Original grade.

Finished grade. Create smooth transition between rootball and existing grade.

Use shovel to make edge of hole rough.

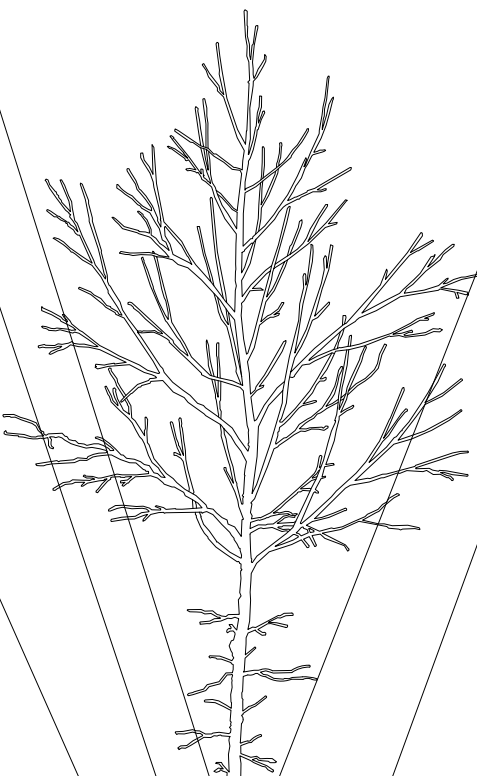

ROOTBALL

3x widest dimension of root ball.

SECTION VIEW

Root flare at top of rootball should be set slightly above grade (2-3").

Prior to mulching, lightly tamp soil around root ball in 6" lifts to brace tree. Do not over-compact. When planting hole has been backfilled, pour water around root ball to settle the soil. Water sufficiently until tree is well rooted.

2-3" layer of mulch. Do not place mulch directly against base of trunk/over root flare.

Loosened soil. Dig and turn soil to reduce compaction to area and depth shown.

Existing soil.

THIS DETAIL WAS TAKEN FROM THE CITY OF ATLANTA'S WEBSITE. IT MAY HAVE BEEN MODIFIED AND SHOULD BE REVIEWED THOROUGHLY. SEE ISA-ARBOR.COM FOR MORE DETAILS.

City of Atlanta



STANDARD DETAILS
TREE PLANTING
DETAIL

REV.
DATE:
ORIG. DATE: JUNE 2017
SCALE: N.T.S.

DETAIL NO. A-2