


**PLAN VIEW**

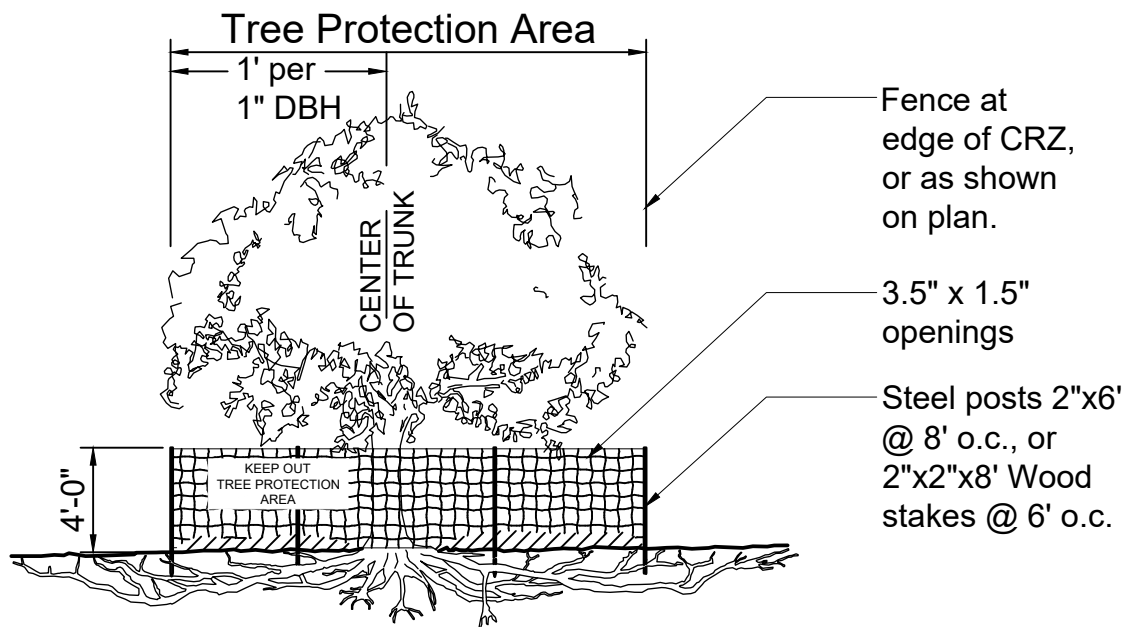

**SECTION VIEW**

**Notes:**

1. No construction activity w/in CRZ; including no storing or stacking materials. Under no circumstances should the fence be trenched in.
2. Tree Protection Fence (TPF) shall remain in place and maintained by repair or replacement throughout construction period or until landscape operations dictate adjustment or removal.

THIS DETAIL WAS TAKEN FROM THE CITY OF ATLANTA'S WEBSITE. IT MAY HAVE BEEN MODIFIED AND SHOULD BE REVIEWED THOROUGHLY.

City of Atlanta



**STANDARD DETAILS**

**TREE PROTECTION—ORANGE PLASTIC FENCE**

REV.

DATE:

ORIG. DATE: JUNE 2017

SCALE: N.T.S.

DETAIL NO. A-3