


FILL VOID BETWEEN PIPE AND
MANHOLE WALL WITH
NON-SHRINK GROUT
BEFORE FORMING MANHOLE
COLLAR

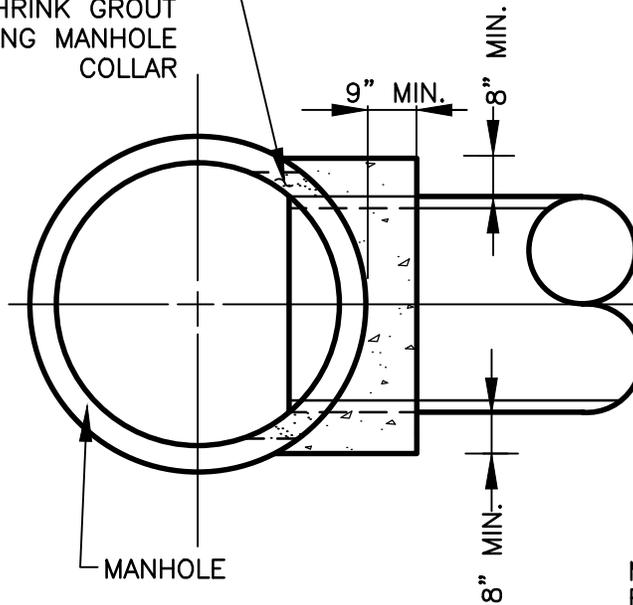


MANHOLE

PLAN

MANHOLE COLLARS SHALL
BE USED FOR SEWER
CONNECTIONS TO MANHOLES :

- 1.) IF EXIST. MANHOLE IS BRICK
- 2.) IF SEWER > 42" ϕ
- 3.) IF MANHOLE IS CONSTRUCTED
OVER EXIST. SEWER
- 4.) TO REPAIR TYPE II BOOT
CONNECTION

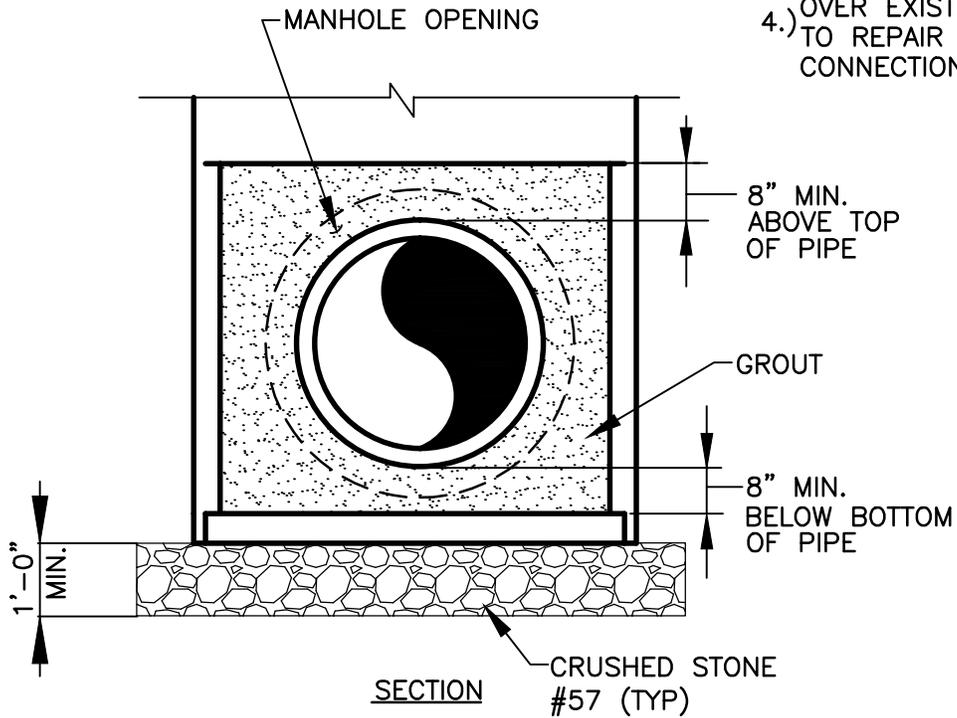

SECTION

THIS DETAIL WAS TAKEN FROM THE CITY OF ATLANTA'S WEBSITE. IT MAY HAVE BEEN MODIFIED AND SHOULD BE REVIEWED THOROUGHLY.

City of Atlanta



STANDARD DETAILS

MANHOLE
COLLAR

REV.

DATE: SEPT 2011

ORIG. DATE: NOV 2004

SCALE: N.T.S.

DETAIL NO. SS-G_MC001